

## **PICOSUB 3**

The PicoSub 3 are, at moment, the smallest subwoofer in the Pico line product.

They are the result of an extensive search on components and careful mechanical design, in order to create

a fully integrated system, eclectic and flexible, with a incredible sound quality and bass extension.

That subwoofer are still ready to form an unless line... to support any powerful design.


All this loudspeakers can be powered with Powersoft® serie X, Ottocanali and Quattrocanali DSP amplifiers, with dedicated presets.



**Loudspeakers**

**PICOSUB 3**

	PicoSub 3
Frequency response	50 ÷ 500 Hz ± 3 db
Efficiency (1W/mt)	75db
AES power (program)	15W (30 W)
SPL 1 mt AES (program)	86 db (89db)
Impedance	4 Ω
Loudspeaker	Reflex passivo
Components	1 x woofer 3" long excursion, 1 x passive radiator 5"
Connections	2 x Faston standard
Size (cm)	9W x 16H x 6D
Weight (Kg)	1

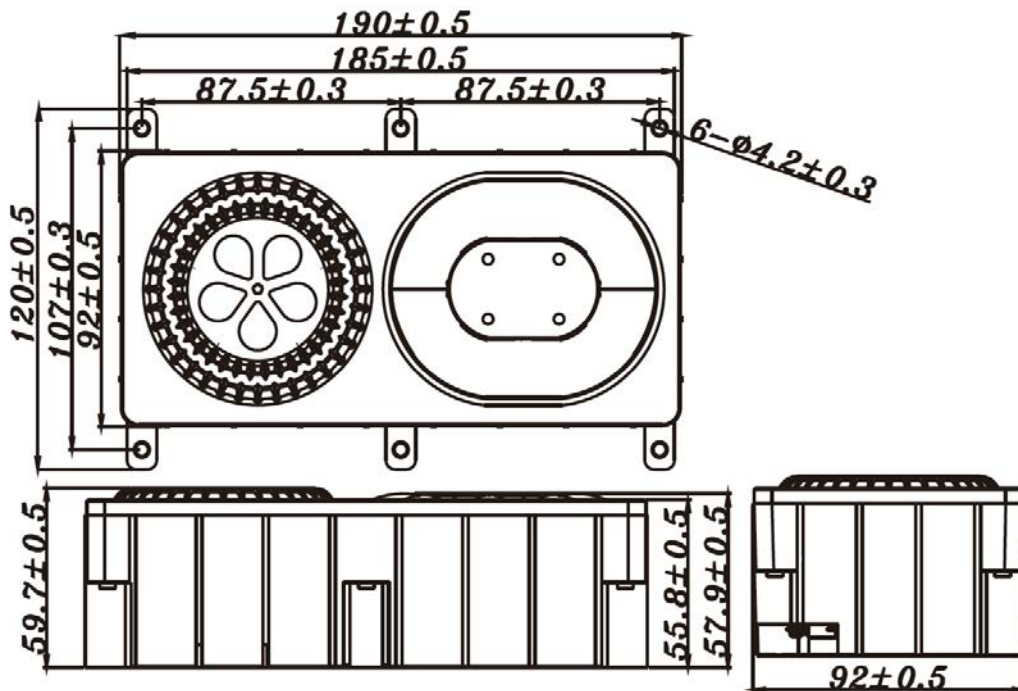

Sonus Audio Services srl reserves the right to make modifications without prior notice.

Data sheet v.1.0

**Sonus Audio Services srl**

[www.sonusaudioservices.it](http://www.sonusaudioservices.it)

[info@sonusaudioservices.it](mailto:info@sonusaudioservices.it)