

SATELLITE 2

SATELLITE 2 represents the maximum expression of SPL capability still maintaining HiFi quality reproduction in so compact size.

It is the result of extensive search on components, their careful coupling and mechanical design, in order to create a really exclusive sound system specifically designed for the “Fragment of Extinction” project.

Its drivers are the best in the HiFi market, with remarkable power handling and robustness.

This passive system embeds a cross-over network with the most performing components available in the market (Intertechnik OFC ferrite cored coils, Mundorf MCAP Evo capacitors, MOX resistances), with a minimum loss in db.

This loudspeaker implements the ZED (Zero Edge Diffractions), ZPD (Zero Phase Drift), TAS (Time Alignment System) and TOC (Total Oxygen-free copper Cabling) technologies.



As SFERA 18 and SATELLITE 1, SATELLITE 2 is compatible with 38W-SUB subwoofer, which extends the response to 25 Hz, and with INFRAHELL Sub, which extends it down to 16Hz. All these speakers can be driven by a Powersoft® amplifier (either “ottocanali” or “quattrocanali” series), with dedicated presets.

	Satellite 2
Frequency response ± 3 db	60 ÷ 20.000 Hz
Efficiency (1W/mt)	93 db
Program power	500 W
SPL continuous (peak)	117 db (123db)
Impedance	4 Ω
Coverage	90°H x 70°V
Drivers	2 x 6,5” woofers + 1 x 1,1” tweeter on waveguide
Connections	1 x SpeakON® 2 wire
Dimensions	32W x 52H x 23P
Weight (Kg)	18


Sonus Audio Services srl

www.sonusaudioservices.it

info@sonusaudioservices.it

SATELLITE 2

Thanks to mechanical accessories, the cabinets can be installed in any configuration, placed on the floor, hanged up or held on wall.

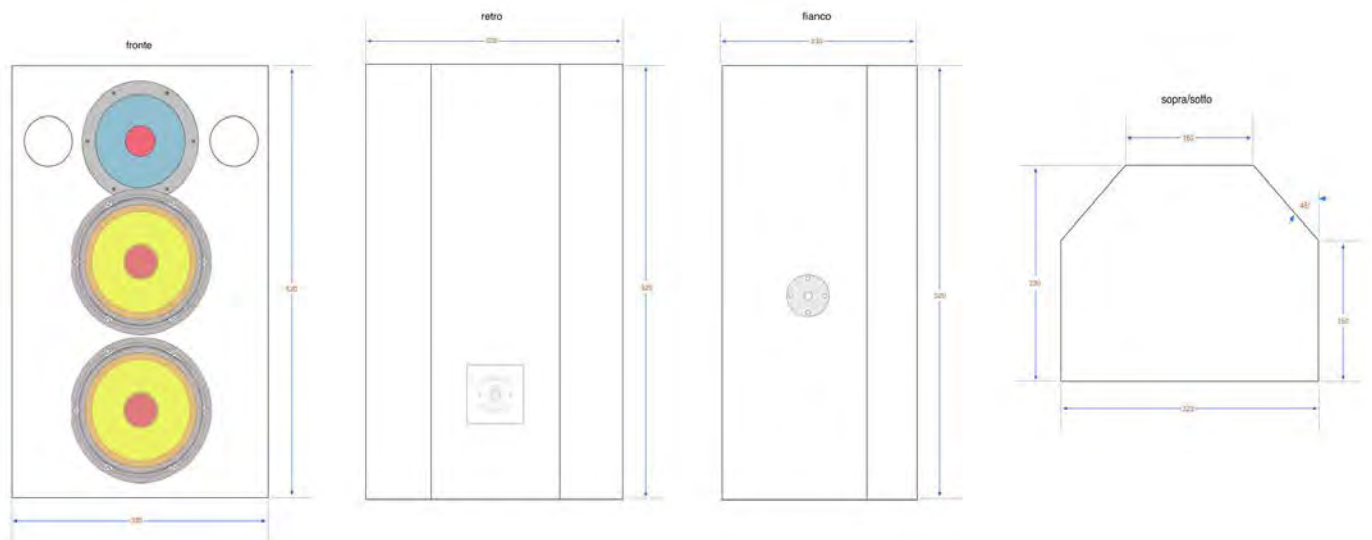

Data sheet v.1.1

Sonus Audio Services srl reserves the right to make modifications without prior note.

Sonus Audio Services srl

www.sonusaudioservices.it

info@sonusaudioservices.it